


# Gothic Porch Swing (Roof)

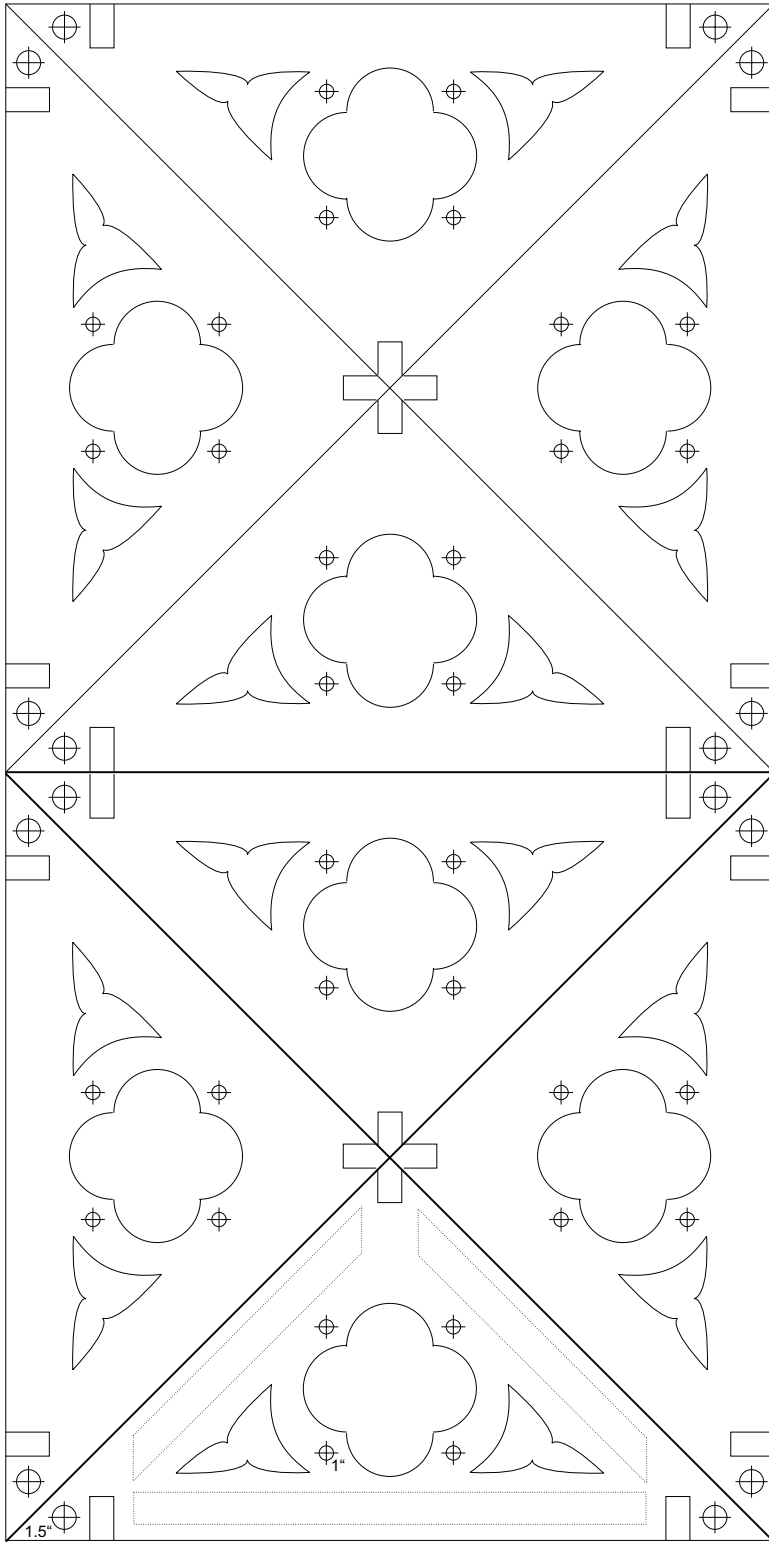

## Materials:


- One 4'x8' sheet of 1/2" plywood
- Three 2"x6"x8' planks
- Eight pieces of 2"x12' mullion molding
- Carpenter's glue
- Box of 3/4" wire nails
- Paint, or stain and varnish as desired

## Tools:

- Circular saw with plywood blade
- Jigsaw with wood-cutting blade
- Drill and bits
- 1.5" hole saw, 1" hole saw or spade bit
- Miter box and saw
- Hammer and chisels
- Combination square

## Directions:

1. Print pattern on transparency film. Use an overhead projector and mark the plywood. Mark the 2x6s and mullions.
2. Cut all pieces. Chisel out the slots in the 2x6s. Drill the large holes.
3. Test assemble.
4. For outdoor use, seal all the exposed edges of the plywood with waterproof glue, including the insides of holes.
5. Nail mullions to plywood.
6. Glue the 2x6 boards to the triangles.
7. Paint or stain.



2" mullion, 22" long, qty. 32



2" mullion, 32" long, qty. 16

